

# MDR752C



## Full D1 4CH H.264 DVR

USB Mouse Control with GUI Display

### FEATURES

#### Mobile Surveillance with EagleEyes

- ❖ Compatible with many popular mobile platforms, such as iPad, iPhone, BlackBerry, Windows Mobile, Symbian & Android.

#### Remote Surveillance with Browsers and CMS

- ❖ For web browsers, compatible with Internet Explorer, Mozilla Firefox, Google Chrome, Safari & Opera.
- ❖ For CMS software, available with our self-developed and free software, "Video Viewer."
- ❖ Applicable also to Apple's media player, QuickTime.

#### Full D1 Recording

- ❖ Full D1 at real-time record on all channels.

#### Fully Remote Independent Operation

- ❖ Channel switching & video playback are fully independent from the local site, allowing users to have private image monitoring remotely.

#### High Performance Design

- ❖ Definable "Resolution" / "Quality" / "IPS" by channels at your preferences to increase the recording efficiency, and avoid any important scenes to be missed.

#### Video Output

- ❖ Supports video output for both composite & VGA simultaneously.
- ❖ Supports VGA resolution output up to 1600 x 1200.


#### Multiplex

- ❖ Allows live display, record, playback, backup and network operation at the same time.

#### Backup Function

- ❖ Supports USB flash drive and network backup.

### REAR PANEL

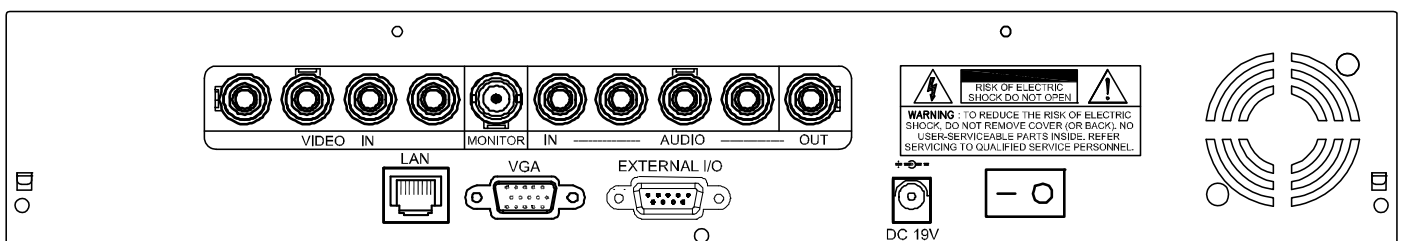

## SPECIFICATIONS

Video System		NTSC / PAL (auto detection)
Video Compression Format		H.264
Video Input (Composite video signal 1 Vp-p 75Ω BNC)		4 channels
Video Output (BNC)		Main Monitor Output: for stable display
Audio Input / Output		4 audio inputs, 1 audio output (Mono)
Maximum Recording Rate	Frame	704x480 pixels with 120 IPS <NTSC> / 704x576 pixels with 100 IPS <PAL>
	Field	704x240 pixels with 120 IPS <NTSC> / 704x288 pixels with 100 IPS <PAL>
	CIF	352x240 pixels with 120 IPS <NTSC> / 352x288 pixels with 100 IPS <PAL>
Image Quality Setting		SUPER BEST / BEST / HIGH / NORMAL
Hard Disk Storage		Accommodates 1 SATA HDD (capacity up to 2TB)
Quick Search		Time / Motion / Alarm search mode
SATA Interface		Built-in
VGA Interface		Built-in (Output resolution up to 1600X1200)
Recording Mode		Manual / Timer / Motion / Alarm / Remote
Multiplex Operation		Live display / record / playback / backup / network operations
USB Mouse Control		YES
Motion Detection Area		16 x 12 grids per channel
Motion Detection Sensitivity		3 adjustable parameters for accurate detection
Pre-alarm Recording		YES
Backup Device		USB 2.0 flash drive / Network
Web Transmitting Compression Format		H.264
Ethernet		10/100 Base-T. Supports remote control and live view via Ethernet
Mobile Surveillance		YES (Including iPad, iPhone, BlackBerry, Windows Mobile, Symbian & Android)
Remote Surveillance (Operating System: Windows 7 / Vista / XP)	CMS:	Our self-developed and free software, "Video Viewer"
	Web Browser:	Internet Explorer, Mozilla Firefox, Google Chrome, Safari & Opera
	Media Player:	QuickTime
	Max. on-line user:	10
Network Protocol		TCP/IP, PPPOE, DHCP and DDNS
Remote Independent Operation		YES
Remote Event Download & Playback		YES
Event Notification		By FTP & E-Mail
IR Remote Control		YES (IR receiver built-in)
Picture Zoom		2X digital zoom
PTZ Control		YES
Alarm I/O		4 inputs, 1 output
Key Lock (Password Protection)		YES
User Level		Administrator & Operator
Video Loss Detection		YES
Camera Title		Supports up to 12 letters
Video Adjustable		Hue / Saturation / Contrast / Brightness
Date Display Format		YY/MM/DD, DD/MM/YY & MM/DD/YY
Daylight Saving		YES
Power Source (±10%)		DC 19V
Power Consumption (±10%)		< 40 W
Operating Temperature		10°C ~ 40°C (50°F ~ 104°F)
Dimensions (mm)**		343(W) x 59(H) x 223(D)
System Recovery		System auto recovery after power failure
Optional Peripherals		Keyboard Controller

\*The specifications are subject to change without notice.

\*\* Dimensional tolerance: ±5mm