

ZOB561L The Most Durable CCTV Camera





Day / Night Color CCD Camera

iNNEKT
Innovative Technology

- 1/3" 760H SONY EXview HAD CCD II
- SONY Effio-E Digital Signal Processor
- The minimum illumination is 0.02 Lux at F1.2
- 560 TV Lines of resolution
- Digital Day / Night
- Stylish aluminum alloy housing design
- Adaptive Tone Reproduction and Noise Reduction
- Wide input voltage with internal regulator (DC 9-20V)
- Accepts all popular CCTV Lenses
- FCC , RoHS , CE Certified



Dimensions (unit : mm)

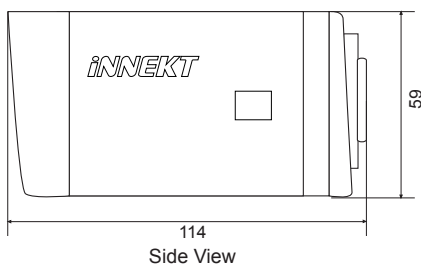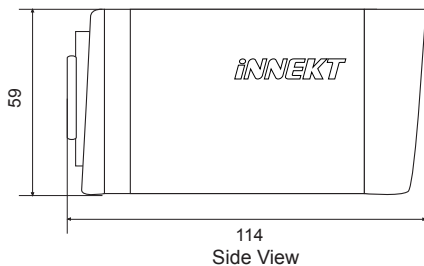

Specification

Model	ZOB561L	
Signal System	PAL	
Image Sensor	1/3" 760H Sony EXview HAD CCD II	
Scanning System	2:1 Interlaced	
Scanning Frequency	H: 15.625 KHz, V: 50 Hz	
Total Pixels	795(H) x 596(V)	
Effective Pixels	752(H) x 582(V)	
Resolution	560 TV Lines	
ESC	Electronic Auto Shutter	1/50 - 1/100,000 sec automatic
	Manual Shutter	1/50, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000
S/N ratio	More than 48 dB (AGC Off)	
Sensitivity	0.02 Lux a F1.2	
Gamma correction	r = 0.45	
Synchronize System	Internal / External Sync	
Video Output	1 Vp-p 75 ohm Composite	
OSD Control	Yes	
Multiple Language OSD	English, French, German, Spanish, Portuguese, Chinese, Russian, Japanese	
Gain control	ON / OFF	
Back Light Compensation	BLC, HLC	
White balance	ATW	Indoor / Outdoor
	Selectable	ATW, Manual, Push lock, Push, User 1, User 2, Anti CR
ATR (D-WDR)	ON / OFF	
Noise Reduction	ON / OFF, Y / C	
Day / Night	Auto / Color / B/W	
Motion Detection	4 Zones	
Privacy Masking	4 Zones	
Digital Effects	Mirror / Brightness / Contrast / Sharpness / Hue / Gain	
Lens	No Lens	
Power Supply	DC12V (Tolerance DC9~20V)	
Operating Temperature	14°F ~ 122°F (-10°C ~ +50°C)	
Storage Temperature	-4°F ~ 140°F (-20°C ~ +60°C)	
Dimension(mm)	114(L) x 59(W) x 59(H)	
Weight(Approx.g)	420g	

FC RoHS CE

www.innekt.com